


Model : **ME - FPL FS45** 4.5 Ton

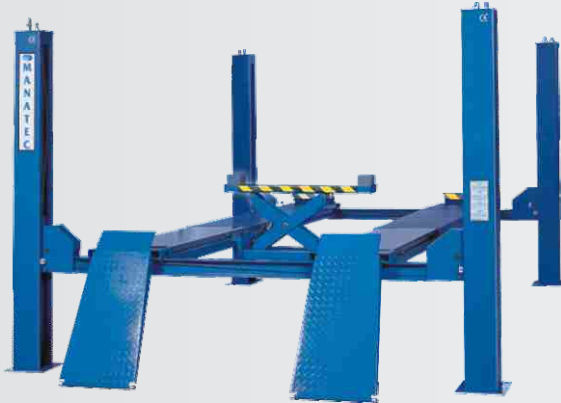

» Electro Hydraulic «

### Salient Features

- Driven by hydraulic cylinder in stable lifting & lowering
- Device performs stable and reliable work with anti-breaking rope safety insurance
- Connected by using steel cables, forced synchronized movement of the lift in order to effectively prevent the sloping of the vehicle
- Level can be well adjusted to meet the need for wheel alignment
- Wheel free jack 2 Ton capacity

### Technical Specification

Lifting capacity	4.5 Ton
Max lifting height	1750 mm
Min lifting height	245 mm
Platform Length	4650 mm
Platform width	530 mm
Lifting speed	<30 seconds
Dropping speed	<30 seconds
Ramp (2 Nos.)	Included
Central Jack	2 Ton
Power supply	380V AC, 3 Phase, 50Hz
Power	2.2 KW

# Hydraulic Washing Lift

Model : **ME - WL 4T / 8T**



Model : **ME - WL 4T SA**



Spider Arm



Tyre Rest Platform (Optional)

### Salient Features

- Hydro pneumatic
- Standard model at 4 ton capacity
- Separate model with Spider Arm design for 4 ton capacity
- Plunger finish - Hard chrome plated to 20 microns
- Heavy duty rigid ramps accommodate a wide range of vehicles of varying size and type

### Technical Specification

Specification	ME - WL 4T	ME - WL 4T SA	ME - WL 8T
Capacity	4 Ton	4 Ton	8 Ton
No. of posts	1 No.	1 No.	1 Nos.
Plunger diameter	270 mm	270 mm	320 mm
Operating pressure	9 to 12 Kg/cm <sup>2</sup>	9 to 12 Kg/cm <sup>2</sup>	12 Kg/cm <sup>2</sup>
Lifting height	1500 mm	1500 mm	1500 mm
Ramp length	4500 mm	—	5500 mm
Spider arm	—	Inclusive	—
Tyre rest platform	Optional	—	Optional
Oil fill capacity	150 ltrs.	150 ltrs.	175 ltrs.